



STEEL DOOR



Pintu baja Steel Door
is a galvanized steel door No.1 in
Indonesia.



Weather Resistant



Sound Proof



Anti Termite




Best Material
Specification



Fire Resistant



www.pintubaja.com

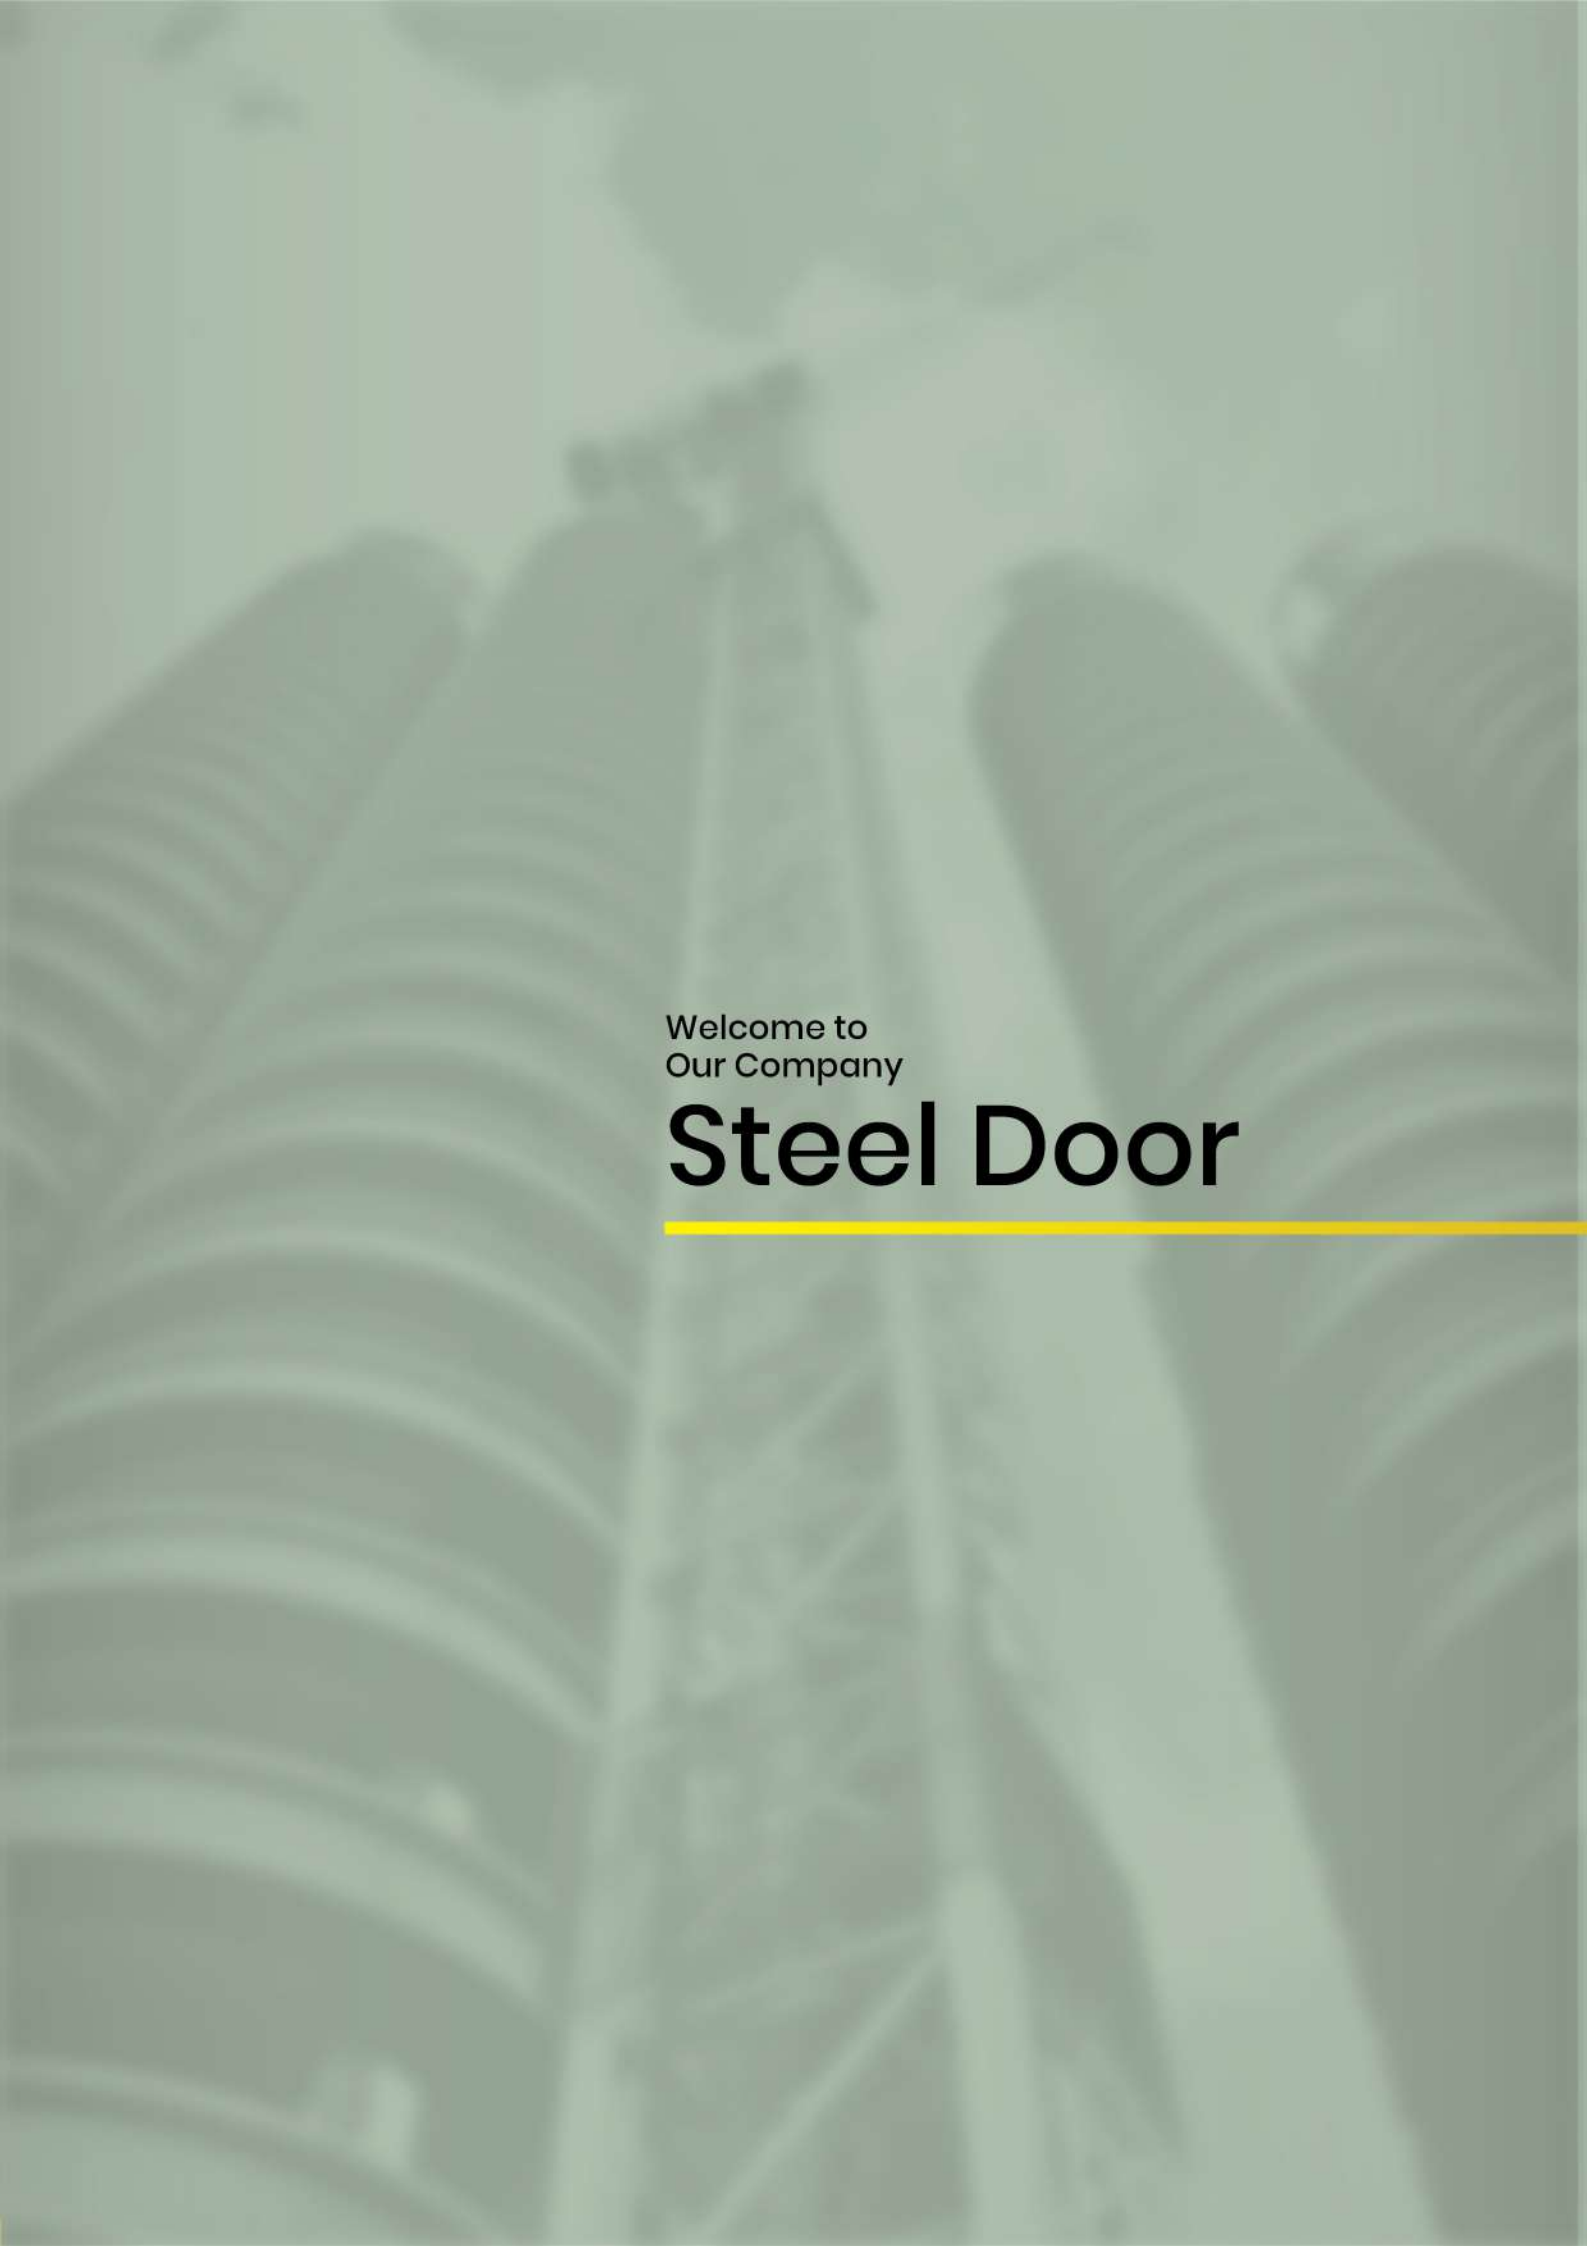

Welcome to
Our Company

Steel Door



History

Welcome to PT. Golden Agin Nusa. Established in 1980, we commenced our journey as agricultural equipment manufacturers in Southeast Asia. With an innovative spirit geared toward continuous growth, we've strived to meet society needs with various exceptional products. In 2008, we expanded our network into the construction sector with our Steel Door brand.

Vision

Embracing the vision to become a leading company in Southeast Asia, dedicated to building and developing to produce a good quality product, is a high work ethic.



Products

Currently, we offer several products in the market, including House Doors, Exit Doors & Fire Doors, Shaft Doors, Lockers, Window & Garage Door.

Production Machinery

To produce superior and quality products, our factory is equipped with advanced production machinery. We meticulously control every production tool to ensure each stage runs with precision and efficiency.

Production System & QC

To ensure the consistency of each product, we have developed a systematic and sustainable production system. Every product undergoes a series of rigorous quality checks. We guarantee that each component meets thickness, strength, and safety standards.

Materials

By consistently using the finest materials, one of which is our finishing using powder coating and accessories that were guaranteed. We create the best steel door product in the market.



Employee

The key to produce quality products lies in the high work ethic of every employee. We ensure that each employee to the company's values to collaborate in creating a professional work environment.

Certification

As a commitment to quality, our company is certified with ISO 9001:2015. Additionally, our fire-resistant doors have passed tests by the Jakarta Fire Department.



Distribution Network

Through the production of Steel Doors, we continue to grow and meet construction needs in Southeast Asia. We have export to Java, Sumatra, Kalimantan, Sulawesi, and even Papua. Moreover, our sales reach international markets such as Malaysia, Vietnam, Philippines, and Australia.

Corporate Social Responsibility (CSR)

Understanding that a company's success should also be measured by its positive contribution to society, we have a strong commitment to corporate social responsibility through the programs we execute.

Company Security

Our foundation is built upon ensuring company security. By conducting checks on all vehicles entering and exiting the company premises, we create a safe and comfortable working environment for all our employees.





Single Door



Weather Resistant



Sound Proof



Anti Termite



Best Material
Specification



Fire Resistant

GA-1 6C



GA- 4B 1C



GA-3A 2C



GA-2NA 1C



GA-2A 6C



GA-KN 7C



GA-2NBB 1C



GA- KM 11C



Color Options :



Brown Texture
1C



Gray Texture
2C



BRONZE TEXTURE
3C



Brown
5C



White
6C



Black
7C



Red
10C



Gray
11C

Soft and elegant colors, powder coating finish, have the advantages of heat resistance, water resistance, UV resistance, and weather resistance. The rough texture produced has a minimalistic and modern appearance.



Double Door



Weather Resistant



Sound Proof



Anti Termite



Best Material
Specification



Fire Resistant

GA-2NA 3C DB



GA-4B 6C DB



GA-KN 6C DB



The measurement can
be customized with minimum order



Weather Resistant



Sound Proof



Anti Termite



Best Material
Specification



Fire Resistant



Single Door Specification

	Frame plate thickness	: 0,7 mm
	Door plate Thickness	: 0,7 mm
	Frame size (L x T)	: 50 x 100 (mm)
	Door Thickness	: 40 mm
	Insulated	: Honey Comb
	Hinges	: 4 Pcs
	Finishing Coating	:
	Accessories	:
	Double door leaf (L x T)	: 830 x 2200 (mm)
	Single frame	: 900 x 2140 mm : 1000 x 2200 mm : 2000 x 2400 mm

Double Door Specification

	Frame plate thickness	: 0,7 mm
	Door plate Thickness	: 0,7 mm
	Frame size (L x T)	: 50 x 100 (mm)
	Door Thickness	: 40 mm
	Insulated	: Honey Comb
	Hinges	: 4 Pcs
	Finishing Coating	:
	Accessories	:
	Double door leaf (L x T)	: 830 + 830 x 2200 (mm)
	Single frame	: 900 x 2140 mm : 1000 x 2200 mm : 2000 x 2400 mm

Door Opening Direction

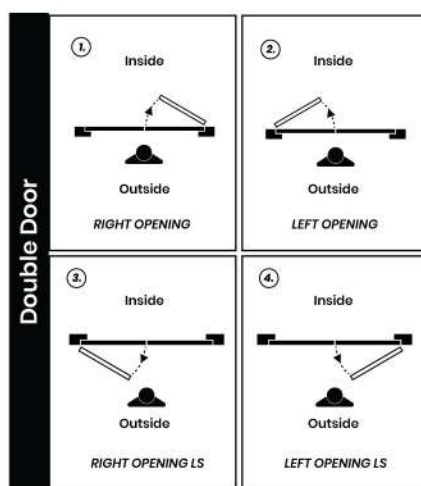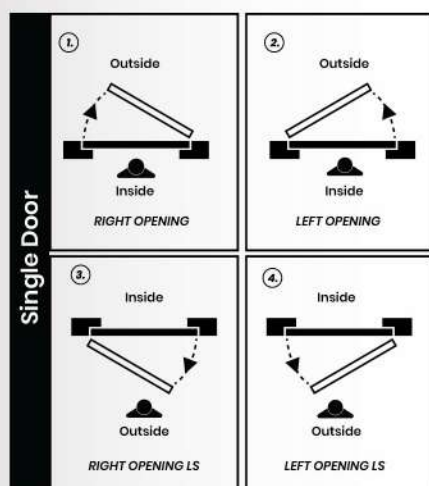

Galvanized



Honey Comb



Mother & Son

GA-2NA + 1 6C BK

GA-3A + 2C 1C BK



	Mother & Son leaf door	: 830 + 500 x 2200 (mm)
	Mother & Son frame size	: 1400 x 2240 (mm)



Exit Door



Exit Door Specification

	Frame plate thickness	: 1,5 mm
	Door plate Thickness	: 1,5 mm
	Frame size (L x T)	: 50 x 100 (mm)
	Door Thickness	: 40 mm
	Insulated	: honey comb
	Hinges	: 4 Pcs
	Finishing Coating	:
	Accessories	:
	Double door leaf (L x T)	: 830 + 830 x 2200 (mm)
	Single frame ED	: 900 x 2240 mm : 1000 x 2400 mm : 2000 x 2400 mm

*Signboard exit not include on the sale





Fire Rated Door

The measurement can be customized with minimum order



Exit Door Specification



	Frame plate thickness	: 2,0 mm
	Door plate Thickness	: 2,0 mm
	Frame size (L x T)	: 50 x 100 (mm)
	Door Thickness	: 50 mm
	Insulated	: Ceramic Fiber Blanket
	Hinges	: 4 Pcs
	Finishing Coating	: JOTUN
	Accessories	: DEKSON
	Double door leaf (L x T)	: 830 + 830 x 2200 (mm)
	Single frame ED	: 900 x 2240 mm : 1000 x 2400 mm : 2000 x 2400 mm



Fire Resistance Certificate



Door Opening Direction

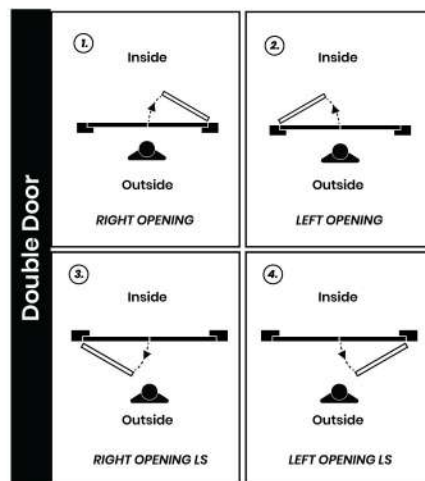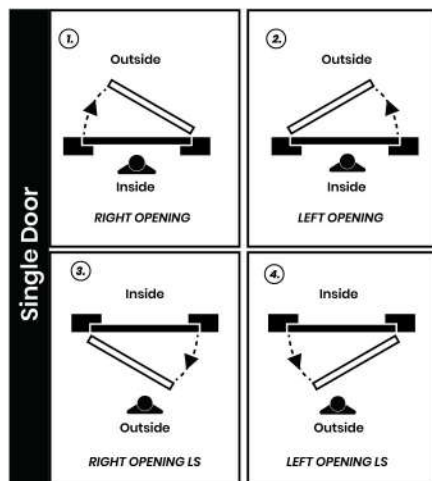

Galvanized



Rockwool





www.pintubaja.com

✉ Support@pintubaja.com  www.pintubaja.com

  Pintubaja Official

For more Information

 +62 813-1762-9898

